

## CS-10 Surface-mounted Ceiling Speaker




### FEATURES:

The CS-10 surface-mounted ceiling speaker can be mounted (exposed installation) to the ceiling where flush mounting is impossible. It can be easily installed thanks to its spring catch method. Push-in connector allows quick wire connection, and speaker lines can be bridged by bridging terminals.

- Designed for use where no ceiling voids are present such as bulkheads, stairwells etc.
- Can be wall mounted.
- 6.5" Twin-cone full range driver unit for high quality sound reproduction.
- Higher SPL and offer wide response for music and speech.
- 10W transformer with multi tapping applications.
- Simple spring fitting system.

### Installation method

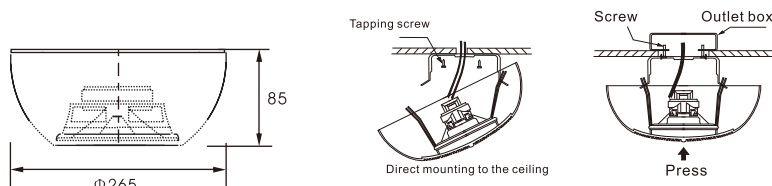

Model No.	CS-10
Rated Input	10W
Max Input	15W
Impedance	1 kΩ, 2 kΩ, 4 kΩ
Power Taps	100V: 10 W, 5 W, 2.5 W; 70V: 5 W, 2.5 W, 1.25 W
SPL (1W /1m)	93dB
MAX SPL (Rated /1m)	103dB
Frequency Response(-10dB)	80Hz~18kHz
Dispersion (4kHz / 1kHz)	80° / 120°
Power Selecting Way	Terminal Block
Material	Housing & Grille: ABS
Color	White
Temperature / Humidity	-20°C ~55°C; <95%
Speaker Component	6.5" TwinConeFullRangeSpeaker
Dimensions	Ø265 x 85 H mm
Weight	1 kg
Mounting	Spring loaded Quick-Mounting Bracket Assembly
Shipping Weight	11kg, 8pcs
Shipping Dimensions	0.0760CBM, 57 x 43 x31 cm, 8pcs