


CS-205A-FD 6W(With fireproof back cover)



FEATURES:

- The middle concave of grid design can enhance the sound reproduction.
- 6.5-inch DVC cone driver.
- The good MF and LF response suitable for the music and human voice.
- The 6W transformer with 2 tapings power options.
- Integrated design for a variety of general occasion.
- Good dynamic range can keep no distortion when large volume output.
- A compact and space-saving design.
- 2 claws of the back cover spring installation.
- Flexible and convenient installation.
- With metal fire proof back cover.

Installation method

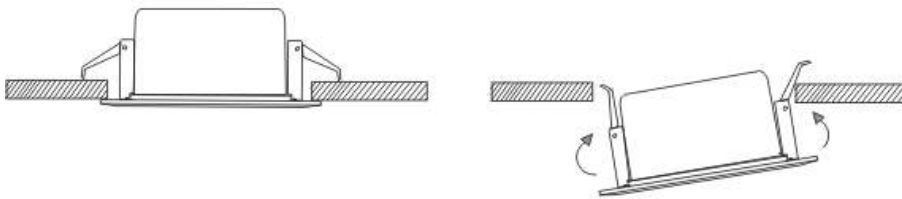

Model	CS-205A - FD
Rated input	6W
Max input	9W
Impedance	1.7kΩ, 3.3kΩ,
Power options	100V: 6W, 3W ; 70V: 3W, 1.5W
SPL(1W / 1m)	90dB
MAX SPL(Rated / 1m)	96dB
Frequency response (-10dB)	100Hz~18kHz
Dispersion(4kHz / 1kHz)	55° / 160°
Power selection way	Three core cable: Blue1.7kΩ, Red3.3kΩ, Black: COM
Material	Panel&Grid&Back cover: Iron
Color	Bright white
Temperature / Humidity	-20°C ~ 55°C; < 95%
Speaker component	6.5" Full range
Dimensions	Ø200 x 100H mm
Mounting Hole	Ø 170 x 110H mm, Max ceiling thickness: 25mm
Net weight	1kg
Mounting	2 spring claws
Gross weight	15kg, 12pcs
Packing dimensions	0.0678CBM, 63 x 43 x 25 cm, 12pcs