


CS-706 Waterproof Ceiling Speaker



FEATURES:

- Dust-proof and waterproof grade conforms to IEC529 IP55 standard
- Suitable for clean dustproof room and high temperature and humidity environments.
- Specially suitable for food products factory, operating room, WC, bathroom or steam sauna rooms.
- 4" full range polypropylene driver unit.
- Omniseal structure.
- Remarkable sound quality from small unit.
- 6W transformer with multi tapping applications.
- Outstanding functions such as anti-collision, dustproof and fire resistance etc.
- Comply with international install and safety standards.

Installation method

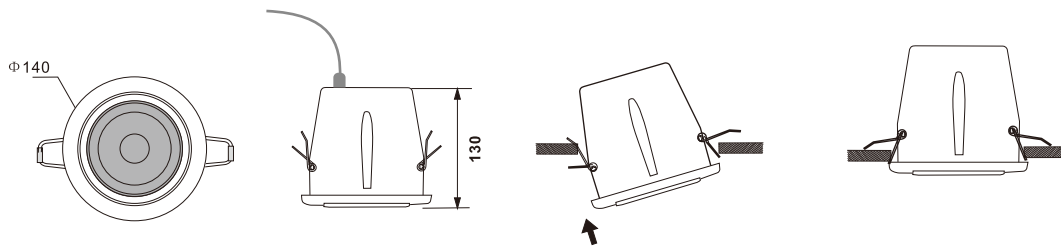

Model No.	CS-706
Rated Input	6W
Max Input	9W
Impedance	1.7 kΩ, 3.3 kΩ
Power Taps	100V: 6 W, 3W; 70V: 3 W, 1.5W
SPL (1W /1m)	88dB
MAX SPL (Rated /1m)	95dB
Frequency Response(-10dB)	150Hz~18kHz
Dispersion (4kHz / 1kHz)	130° / 210°
Power Selecting Way	Three Core Cable: White 1.7 kΩ, Green 3.3 kΩ, Black COM
Material	Panel & Cover: ABS; Grille: Steel
Color	Brilliant White
Temperature / Humidity	-30°C ~60°C; <95%
Water Protection	IEC529 IP55
Speaker Component	4" Twin Cone Speaker
Dimensions	Ø140 x 130H mm
Mounting Hole	Ø125 x 140H mm, Max Ceiling Thickness:25mm
Weight	0.9kg
Mounting	2 Spring Catch (Like mounting a spotlight)
Shipping Weight	17.5kg, 16pcs
Shipping Dimensions	0.0794CBM, 62 x 32 x40 cm, 16pcs