

## FS-Q4/Q5/Q6 wall mounted speaker



### FEATURES:

The FS-Q series Fashion speakers are compact systems with rugged HIPS housing to ensure its durability and sound quality.

This series of speakers rated to IP55. Designed for widely-using in outdoor applications which need good sound quality: like commercial pedestrian street, pub street, villa, swimming pool, golf course, and playground. It can also have extraordinary performance in use of indoor: conference room, boardroom, and multi-functional room.

They are suitable for outdoor applications also indoor applications are good as well.


Matching transformer with multi taps selections for 100/70V/8Ω input, offers versatility, and it is capable for profession audio and public address applications.

We offer black and white alternative color or other spraying colors which are concerted to decoration, and it is fit for different environment.

Humanizing design mounting bracket makes installation easy and fast, saving installation cost and time. You can also change the speaker's any angle in order to control sound directivity.

- Dust-proof and waterproof grades in accordance with IEC529 IP55 standard.
- Good sound quality.
- Weatherproof housing design for pro-audio and commercial market.
- Have 100/70V and 8Ω selectable switch.
- Matching transformer with multi tapplings for 100/70V input.
- Available in black and white color.
- Very high quality 2 way speaker system.
- U type steel bracket include for fast and easy installation. (Also optional other bracket)

### Installation method

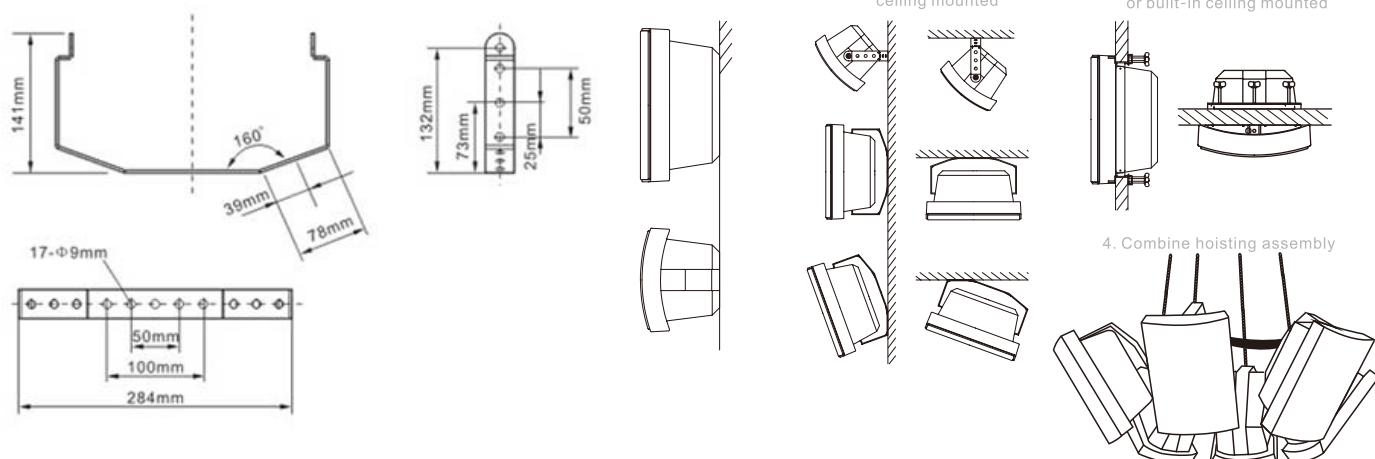



## FS-Q4/Q5/Q6 wall mounted speaker

ModelNo.	FS - Q4 B/W
Rated Input	20W@100/70V ; 40W@8Ω
Max Input	30W@100/70V;80W@8Ω
High Impedance	83Ω, 167Ω, 333Ω, 667Ω, 1.33kΩ,
Power Taps	100V: 20W, 10W, 5W, 2.5W; 70V: 10W, 5W, 2.5W, 1.25W
SPL (1W / 1m)	88dB
MAX SPL(Rated /1m)	108dB@100/70V; 110dB@8Ω
Frequency Response(-10dB)	90Hz~20kHz
Dispersion (4kHz / 1kHz)	90° / 190°
Power Selecting Way	Rotating Selection Switch
Material	Housing: HIPS; Grille: Steel
Color	Black; White
Temperature / Humidity	-30°C~60°C; <95%
Water Protection	IEC529 IP55
Speaker Component	4"Woofer+1"Tweeter
Dimensions	129 (W) x 238(H) x 158(D)
Weight	2.9kg
Mounting	U Type Mounting Bracket Or Optional Other Bracket
Shipping Weight	12.2 kg, 4 pcs
Shipping Dimensions	0.0686CBM, 48*42*34cm, 4 pcs

Model	FS - Q6 B/W
Rate Power	60W@100V; 90W@8Ω
Max Power	90W@100V; 180W@8Ω
Impedance	83Ω, 167Ω, 333Ω, 667Ω, 1.33kΩ,
Power Select	100V: 60W, 30W, 15W, 7.5W; 70V: 60W, 30W, 15W, 7.5W, 3.75W.
S.P.L(1W /1m)	90dB
Frequency Response(-10dB)	70Hz~20kHz
Speaker Unit	6.5"Woofer+1"Tweeter
Size	214 (W) x 329(H) x 178(D)
Net Weight	4.8kg
Shipping Weight	21.4 kg, 4 pcs
Shipping Dimensions	0.12CBM, 56*51*42 cm,4 pcs
Other specifications same asFS - Q4	

Model No.	FS - Q5 B/W
Rated Input	40W@100V; 80W@8Ω
Max Input	60W@100V; 160W@8Ω
High Impedance	125Ω, 250Ω, 500Ω, 1kΩ, 2kΩ
Power Taps	100V: 40W, 20W, 10W, 5W; 70V: 40W, 20W, 10W, 5W, 2.5W
SPL (1W /1m)	90dB
MAX SPL (Rated /1m)	106dB@100/70V; 109dB@8Ω
Frequency Response(-10dB)	70Hz~20kHz
Crossover Slope	12dB / Octave
Dispersion (4kHz / 1kHz)	125° / 190°
Power Selecting Way	Rotating Selection Switch
Material	Housing: HIPS; Grille: Steel
Color	FS-Q5B: Black;FS-Q5W: White
Temperature / Humidity	-30°C~60°C; <95%
Water Protection	IEC529 IP55
Speaker Component	5" Woofer + 1" Tweeter
Dimensions	196(W) x 295(H) x 157(D)
Weight	3.6kg
Mounting	U Type Mounting Bracket Or Optional Other Bracket
Shipping Weight	17kg, 4pcs
Shipping Dimensions	0.0718CBM, 50 x 41 x35 cm, 4pcs