


HJ-10B/20B Waterproof PA hanging speaker



FEATURES:

- Dust-proof and waterproof grade conforms to IEC529 IP55 standard.
- Designed for controlling pendent sound directivity.
- Widely used in outdoor and indoor where need pendent speakers.
- Another ideal choice for wide range frequency projection speaker.
- Good frequency response is ideal for music and speech applications.
- Stable long-life Aluminum alloy cover with strong anticorrosion, can avoid all kinds of bad weather.
- Built-in with steel wire rope inside suspension cable can load 50kg which can prevent cable from burst under bad condition.
- Matching transformer with multi taps for 100/70V input.
- 5.25" and 6.5" full range waterproof unit.
- Including U type bracket for fast and easy installation.

Installation method

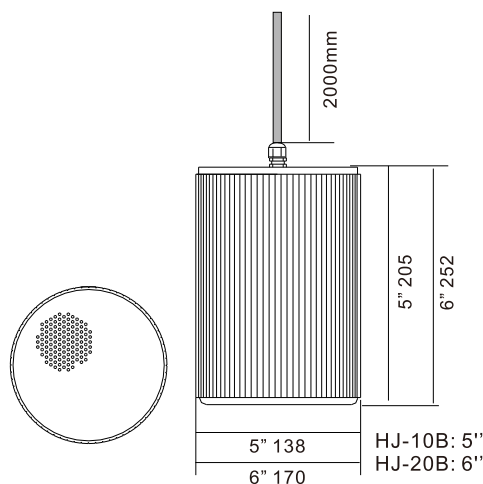

Model No.	HJ-10B	HJ-20B
Rated Input	10W	20W
Max Input	20W	40W
Impedance	1KΩ, 2KΩ, 4KΩ	500Ω, 1KΩ, 2KΩ
Power Taps	100V: 10 W, 5 W, 2.5W 70V: 5 W, 2.5 W, 1.25W	100V: 20 W, 10 W, 5W 70V: 10 W, 5 W, 2.5W
SPL (1W /1m)	91dB	92dB
MAX SPL (Rated /1m)	101dB	105dB
Frequency Response(-10dB)	130Hz~15kHz	110Hz~15kHz
Dispersion (4kHz / 1kHz)	230° / 65°	
Power Selecting Way	Four Core Cable; Red: Rated impedance; Yellow: Twice Rated impedance; Green: Quadrupling Rated impedance; Blue: COM	
Material	Case: Aluminum alloy; Grille: steel	
Color	Brilliant White	
Temperature / Humidity	-30°C ~60°C; <95%	
Water Protection	IEC529 IP55	
Speaker Component	5.25" Twin Cone Speaker	6.5" Twin Cone Speaker
Dimensions	Ø138 x205Lmm	Ø170 x252Lmm
Weight	2.1kg	2.7kg
Mounting	2 metres Pendant Cable Built- in Safety Steel Wire Cable	
Shipping Weight	19kg, 8pcs	19kg, 6pcs
Shipping Dimensions	0.0816CBM, 74 x 38 x29 cm, 8pcs	0.1059CBM, 65 x 44 x37 cm, 6pcs