


# HS-15A/30A Horn Speaker (ABS)



### FEATURES:

- Dust-proof and waterproof grades in accordance with IEC529 IP66 standard.
- High impact ABS construction that is mechanically strong and resistant to impact .
- UV protection and weatherproof design can install outdoor for many years.
- High directivity and efficiency.
- U type steel bracket or optional swivel type bracket for fast and easy installation.
- Matching transformer with multi taps for 100/70V input.

### Installation method

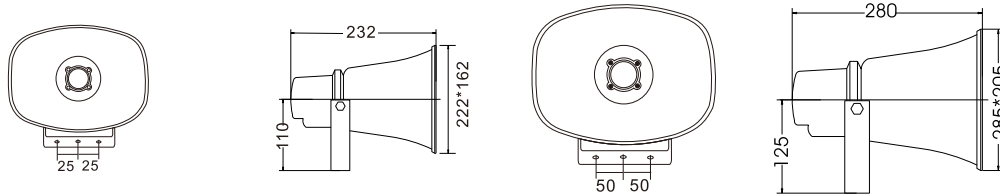

Model No.	HS-15A	HS-30A
Rated Input	15W	30W
Max Input	20W	45W
Impedance	666Ω, 1.3kΩ	333Ω, 666Ω
Power Taps	100V: 15 W, 7.5W 70V: 7.5 W, 3.75W	100V: 30 W, 15W; 70V: 15 W, 7.5W
SPL (1W /1m)	103dB	105dB
MAX SPL (Rated /1m)	114dB	120dB
Frequency Response (-10dB)	400Hz~5kHz	400Hz~6kHz
Dispersion (4kHz / 1kHz)	30° / 120°	30° / 110°
Power Selecting Way	Three Core Cable; White: Rated impedance; Green; Twice Rated impedance; Black: COM	
Material	Housing: High Impact ABS	
Color	Brilliant White	
Temperature / Humidity	-30°C~60°C; <95%	
Water Protection	IEC529 IP66	
Speaker Component	Horn Driver Unit	
Dimensions	222(W) x 162(H) x 232(D) mm	285(W) x 205(H) x 280(D) mm
Weight	1.4kg	1.8kg
Mounting	U Type Mounting Bracket or Optional Swivel Type Bracket	
Shipping Weight	19kg, 12pcs	9.5kg, 4pcs
Shipping Dimensions	0.1427CBM, 56 x 49 x 52 cm, 12pcs	0.1155CBM, 53 x 33 x 66 cm, 4pcs