



HS-15B/30B/50B Horn Speaker (Aluminium)

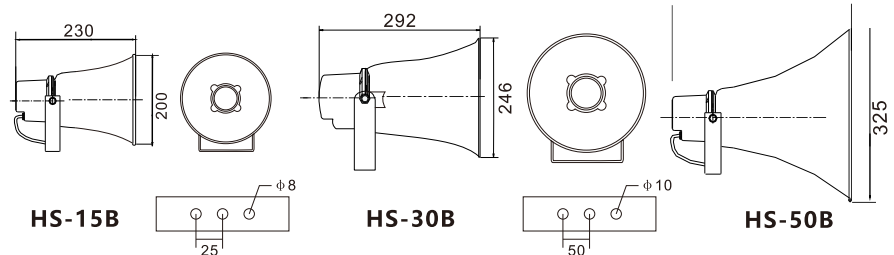

FEATURES:

- Dust-proof and waterproof grades in accordance with IEC529 IP66 standard.
- Aluminum cover construction that is mechanically strong and resistant to impact .
- Ideal for many kinds of bad industrial condition.
- Weatherproof design can install outdoor for many years.
- High directivity and efficiency.
- U type steel bracket or optional swivel type bracket for fast and easy installation.
- Matching transformer with multi taps for 100/70V input.
- Rated to international installation and safety standard.

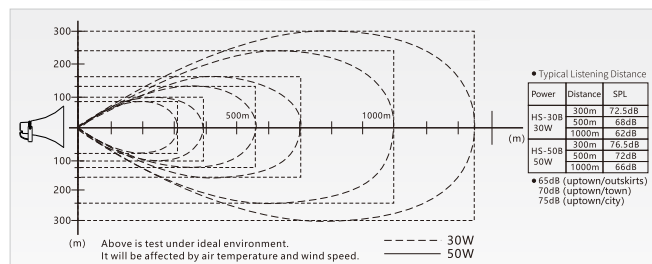

Model No.	HS-15B	HS-30B	HS-50B
Rated Input	15W	30W	50W
Max Input	20W	45W	75W
Impedance	666 Ω , 1.3k Ω	333 Ω , 666 Ω	200 Ω , 400 Ω
Power Taps	100V: 15 W, 7.5W 70V: 7.5 W, 3.75W	100V: 30 W, 15W; 70V: 15 W, 7.5W	100V: 50 W, 25W; 70V: 25 W, 12.5W
SPL (1W /1m)	106dB	107dB	109dB
MAX SPL (Rated /1m)	117dB	122dB	126dB
Frequency Response(-10dB)	450Hz~5kHz	380Hz~6.5kHz	380Hz~6.5kHz
Dispersion (4kHz / 1kHz)	30° / 120°	30° / 100°	30° / 90°
Power Selecting Way	Three Core Cable; White: Rated impedance; Green: Twice Rated impedance;Black: COM		
Material	Housing: High Impact :Aluminum		
Color	Grayish-white or Gray		
Temperature / Humidity	-35°C~70°C; <95%		
Water Protection	IEC529 IP66		
Speaker Component	Horn Driver Unit		
Dimensions	$\varnothing 200 \times 230$ Lmm	$\varnothing 246 \times 292$ Lmm	$\varnothing 325 \times 350$ Lmm
Weight	1.9kg	2.1kg	2.8kg
Mounting	U Type Mounting Bracket or Optional Swivel Type Bracket		
Shipping Weight	13kg, 6pcs	11kg, 4pcs	14kg, 4pcs
Shipping Dimensions	0.1492CBM, 67 x 42 x53 cm, 6pcs	0.1091CBM, 58 x 57 x33 cm, 4pcs	0.2080CBM, 72 x 38 x76 cm, 4pcs