




## HW-30S Wide Range Projector Speaker (ABS)



### FEATURES:

- Dust-proof and waterproof grades in accordance with IEC529 IP55 standard.
- Constant directivity horn improve directivity characteristics and ensure a clear and consistent sound field
- Lightweight ABS resin enclosure that is mechanically strong and resistant to impact.
- UV protection and weatherproof polyurethane resin paint permits the speaker to stand up to many years of outdoor installation.
- Wide frequency response provide the high quality voice and music reproduction.
- 100V/70V and 8Ω selectable switch.
- Matching transformer with multi taps for 100/70V input.
- Including U type bracket for fast and easy installation.

### Installation method

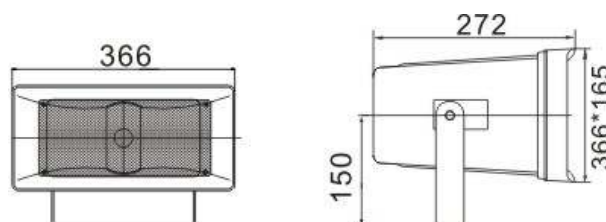

|                            |                                                                         |
|----------------------------|-------------------------------------------------------------------------|
| Model No.                  | HW-30S                                                                  |
| Rated Input                | 30W@100/70V; 60W@8 Ω                                                    |
| Max Input                  | 45W@100V; 90W@8 Ω                                                       |
| High Impedance             | 167Ω, 333Ω, 667Ω, 1.3kΩ, 2.6kΩ                                          |
| Power Taps                 | 100V: 30 W, 15 W, 7.5 W, 3.75W;<br>70V: 30 W, 15 W, 7.5 W, 3.75 W, 1.9W |
| SPL (1W / 1m)              | 97dB                                                                    |
| MAX SPL (Rated / 1m)       | 112dB@100/70V; 115dB@8 Ω                                                |
| Frequency Response( -10dB) | 120Hz~15kHz                                                             |
| Dispersion (4kHz / 1kHz)   | Vertical Unchanging 90°                                                 |
| Power Selecting Way        | Rotating Selectable Switch                                              |
| Material                   | Housing: High Impact ABS; Grille: Steel                                 |
| Color                      | Sliver Gray                                                             |
| Temperature / Humidity     | -30°C ~ 60°C; <95%                                                      |
| Water Protection           | IEC529 IP55                                                             |
| Speaker Component          | 5.25" Waterproof Speaker Unit                                           |
| Dimensions                 | 366(W) x 165(H) x 272(D) mm                                             |
| Weight                     | 3kg                                                                     |
| Mounting                   | U Type Mounting Bracket                                                 |
| Shipping Weight            | 5kg, 1pcs                                                               |
| Shipping Dimensions        | 0.0381CBM, 44 x 24 x 36 cm, 1pcs                                        |