


MHS-80S HORN SPEAKER(ABS)



FEATURES:

- Dust-proof and waterproof grade conforms to IEC529 IP66 standard
- 2-way high quality speaker unit
- Lightweight, high-strength ABS synthetic resin housing resists shocks
- UV protection can handle many years of outdoor environment installation
- 90Hz~20kHz ultra-wide frequency response provides high quality voice reproduction
- Built-in 100V/70V matching transformer for constant voltage broadcast systems and multiple power options
- Support 8Ω fixed resistance input connection (MHS-50S only)
- U-mounting bracket provides quick and easy installation

Installation method

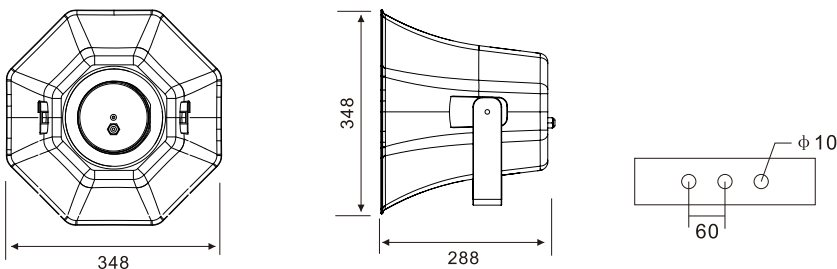

Model No.	MHS-80S
Rated power	80W@100V;
Max power	120W@100V
Constant pressure impedance	125Ω, 250Ω, 500Ω, 1kΩ
Power selection	100V: 80W, 40W, 20W, 10W 70V: 40W, 20W, 10W, 5W
SPL(1W / 1m)	102dB
MAX SPL(Rated / 1m)	123dB
Frequency response(-10dB)	90Hz~20kHz
Diffusion angle(4kHz / 1kHz)	30° / 90°
Power selection method	Wiring method: red: rated impedance ;yellow: double rated impedance; green: Eight times rated impedance; black:COM
Material	BOX: high-duty ABS
Color	silver gray
Working temperature/humidity	-30°C ~ 60°C;<95%
IPXX	IEC529 IP66
Speaker unit	Horn drive unit
Dimension	348(W) x 348(H) x 288(D) mm
Weight	5.41kg
Mounting	U-shaped mounting bracket
Net weight	6.51kg, 1pc
Package size	0.0521CBM, 37 x 37 x38 cm, 1pc