


SK-610/620/630/640 Outdoor Column Speaker




FEATURES:

- Dust-proof and waterproof grades in accordance with IEC529 IP55 standard.
- Weatherproof luxurious speaker designed for outdoor use.
- Ideal choice for factory, building, school, parking lot, marina and station.
- Aluminum alloy construction for long-life outdoor use.
- Built-in 100V/70V matching transformer and provide two-stage power selection.
- Good sound pressure level for powerful and clear sound quality.
- 4" full range speaker unit and 1" waterproof tweeter.
- Amazing SPL for powerful and clear sound quality.
- Including L type bracket for fast and easy installation.

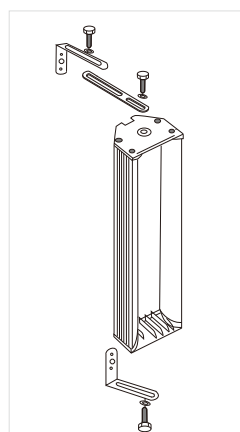

• 音柱喇叭指向性

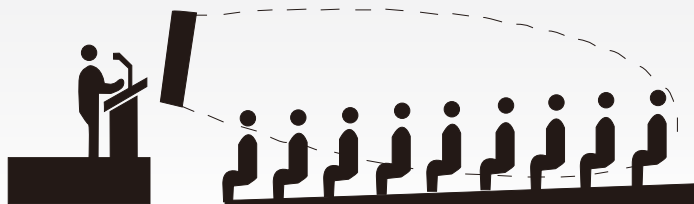

Model No.	SK-610	SK-620	SK-630	SK-640
Rated Input	10W	20W	30W	40W
Max Input	15W	30W	45W	60W
Impedance	1KΩ, 2KΩ	500Ω, 1KΩ	330Ω, 660Ω	250Ω, 500Ω
Power Taps	100V: 10 W, 5W 70V: 5 W, 2.5W	100V: 20 W, 10W 70V: 10 W, 5W	100V: 30 W, 15W 70V: 15 W, 7.5W	100V: 40 W, 20W 70V: 20 W, 10W
SPL (1W / 1m)	91dB	92dB	93dB	94dB
MAX SPL (Rated / 1m)	101dB	104dB	108dB	110dB
Frequency Response (-10dB)	100Hz ~ 20kHz			
Dispersion (4kHz / 1kHz)	Horizontal: 160° / 190° Vertical: 85° / 150°	Horizontal: 120° / 190° Vertical: 30° / 125°	Horizontal: 105° / 195° Vertical: 30° / 105°	Horizontal: 140° / 205° Vertical: 45° / 85°
Power Selecting Way	Three Core Cable; Green: Rated impedance; Red: Twice Rated Impedance; Yellow: COM			
Material	Case: Aluminum alloy; Grille: Steel			
Color	Gray			
Temperature / Humidity	-30°C ~ 60°C; < 95%			
Water Protection	IEC529 P55			
Speaker Component	4" Woofer x1 + 1.5" Tweeter	4" Woofer x2 + 1.5" Tweeter	4" Woofer x3 + 1.5" Tweeter	4" Woofer x4 + 1.5" Tweeter
Dimensions (W x H x D)	150 x 125 x 258mm	150 x 125 x 378mm	150 x 125 x 498mm	150 x 125 x 618mm
Weight	1.8kg	2.9kg	3.9kg	4.9kg
Mounting	L Type Mounting Bracket Or Optional Other Bracket			
Shipping Weight	5Kg, 2pcs	7kg, 2pcs	9kg, 2pcs	11kg, 2pcs
Shipping Dimensions	0.0149CBM,	0.0210CBM,	0.0272CBM,	0.0333CBM,