


CS-306 6W Ceiling Speakers(Quick-Mounting Type)



FEATURES:

- Dished grille design for acoustic integrity.
- 4" twin cone speaker is suitable for music & speech reproduction.
- 6W transformer with multi tapping applications.
- Integrated design used in various places.
- Wide dynamic range can keep in large volume output without distortion.
- Space saving design.
- Easy installation secured by three integral spring-loaded quick-mounted locking clamps.
- Optional steel fire dome

Installation method

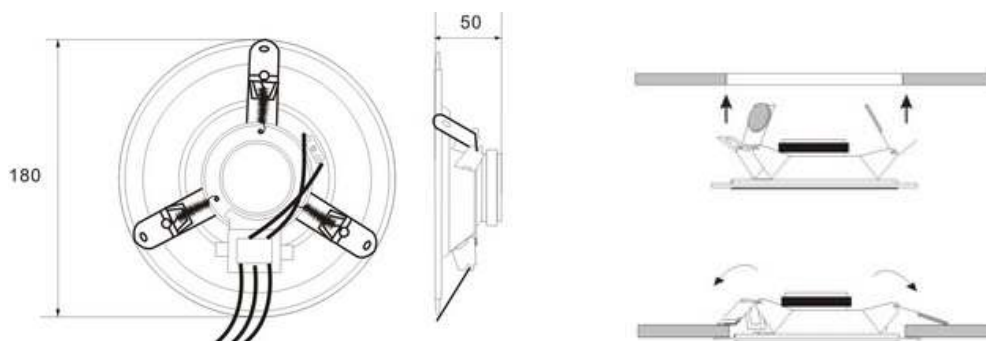

Model No.	CS306
Rate Power	6W
Max power	9W
Impedance	1.7Ω, 3.3kΩ
Constant power	100V:6W,3W, 70:3W,1.5W
SPL(1W/1m)	90dB
Max SPL(Rated / 1m)	96dB
Frequenc response(-10dB)	110Hz ~ 16kHz
Spread angle	90°
Power wiring	Three-core cable: red 1.7kΩ, white 3.3kΩ, Black: COM
Material	Panel & Grille : steel
Colour	White
Operating Temp	-20°C ~ 55°C; <95%
Speakers Unit	4 "full-range
Size	Ø180 x 50H mm
Hole size	Ø155mm, Max ceiling thickness:25mm
Weight	0.65kg
Installnation	3 spring mounting clip
Gross weight	11kg, 12pcs
Packing Size	0.0352CBM, 41 x 39 x 22 cm, 12pcs